


# LARGE ROTATING PULVERIZERS VPR-A

Designed secondary processing to remove rebar and size concrete.  
 360 degree hydraulic, increases productivity.  
 Replaceable teeth reduce maintenance time and cost.

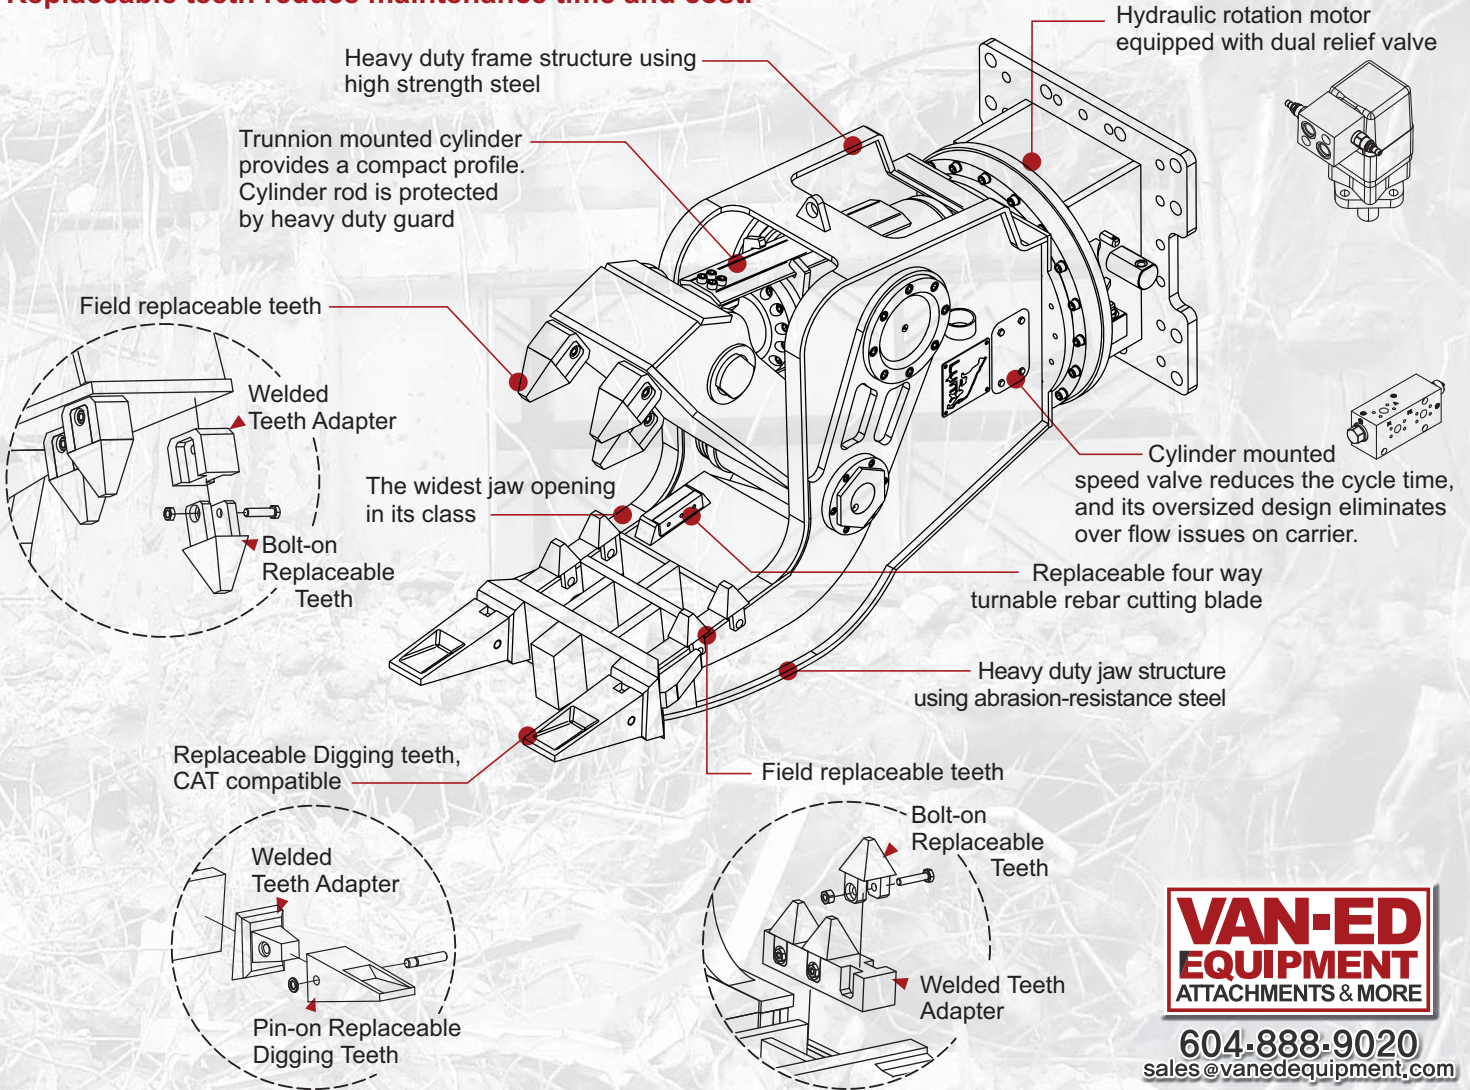

FOR 20-60 TON CARRIER


**VAN-ED**  
**EQUIPMENT**  
 ATTACHMENTS & MORE

604-888-9020  
 sales@vanedequipment.com



# LARGE ROTATING PULVERIZERS VPR-A

FOR 20-60 TON CARRIER

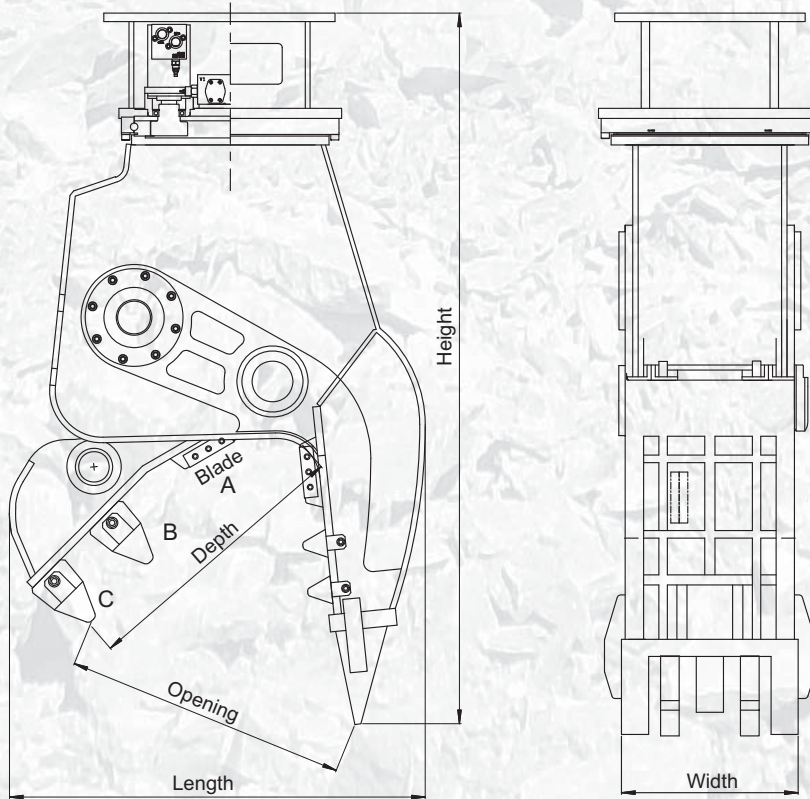

Model		Unit	VPR 202A	VPR 302A	Unit	VPR 202A	VPR 302A
Carrier Weight		M/T	23~30	30~35	M/T	23~30	30~55
Operating Weight		kg	2,250	2,800	lb	4,950	6,160
DIM	Height	mm	2,478	2,620	inch	98	103
	Length		1,420	1,620		56	64
	Width		540	600		21	24
Jaw Opening		mm	925	1,100	inch	36	43
Jaw Depth			870	900		34	39
Blade Length			200	200		7.9	7.9
Cutting Force [A]		M/T (Metric Ton)	202	257	lb (X1000)	444	565
Crushing Force	[B] Mid		95	121		209	266
	[C] Tip		62	79		137	174
Rated Pressure		bar	320		psi	4,600	
Rated Oil Flow		lpm	320	360	gpm	84	95
Hyd. Rotation	Pressure	bar	210	210	psi	3,050	3,050
	Oil Flow	lpm	32~45	32~45	gpm	8.5~12	8.5~12
	Speed	RPM	10~15		RPM	10~15	
Cycle time	Open	sec	2.2	2.2	sec	2.2	2.2
	Close		1.9	1.9		1.9	1.9

Specifications subject to change without notice.

- Height : Flat Top Mounting
- Cycle Time : Measured at rated flow under no load.