


# MIDSIZE ROTATING PULVERIZERS VPR-A

FOR 10-20 TON CARRIER

Designed secondary processing to remove rebar and size concrete.  
360 degree hydraulic, increases productivity.  
Replaceable teeth reduce maintenance time and cost.

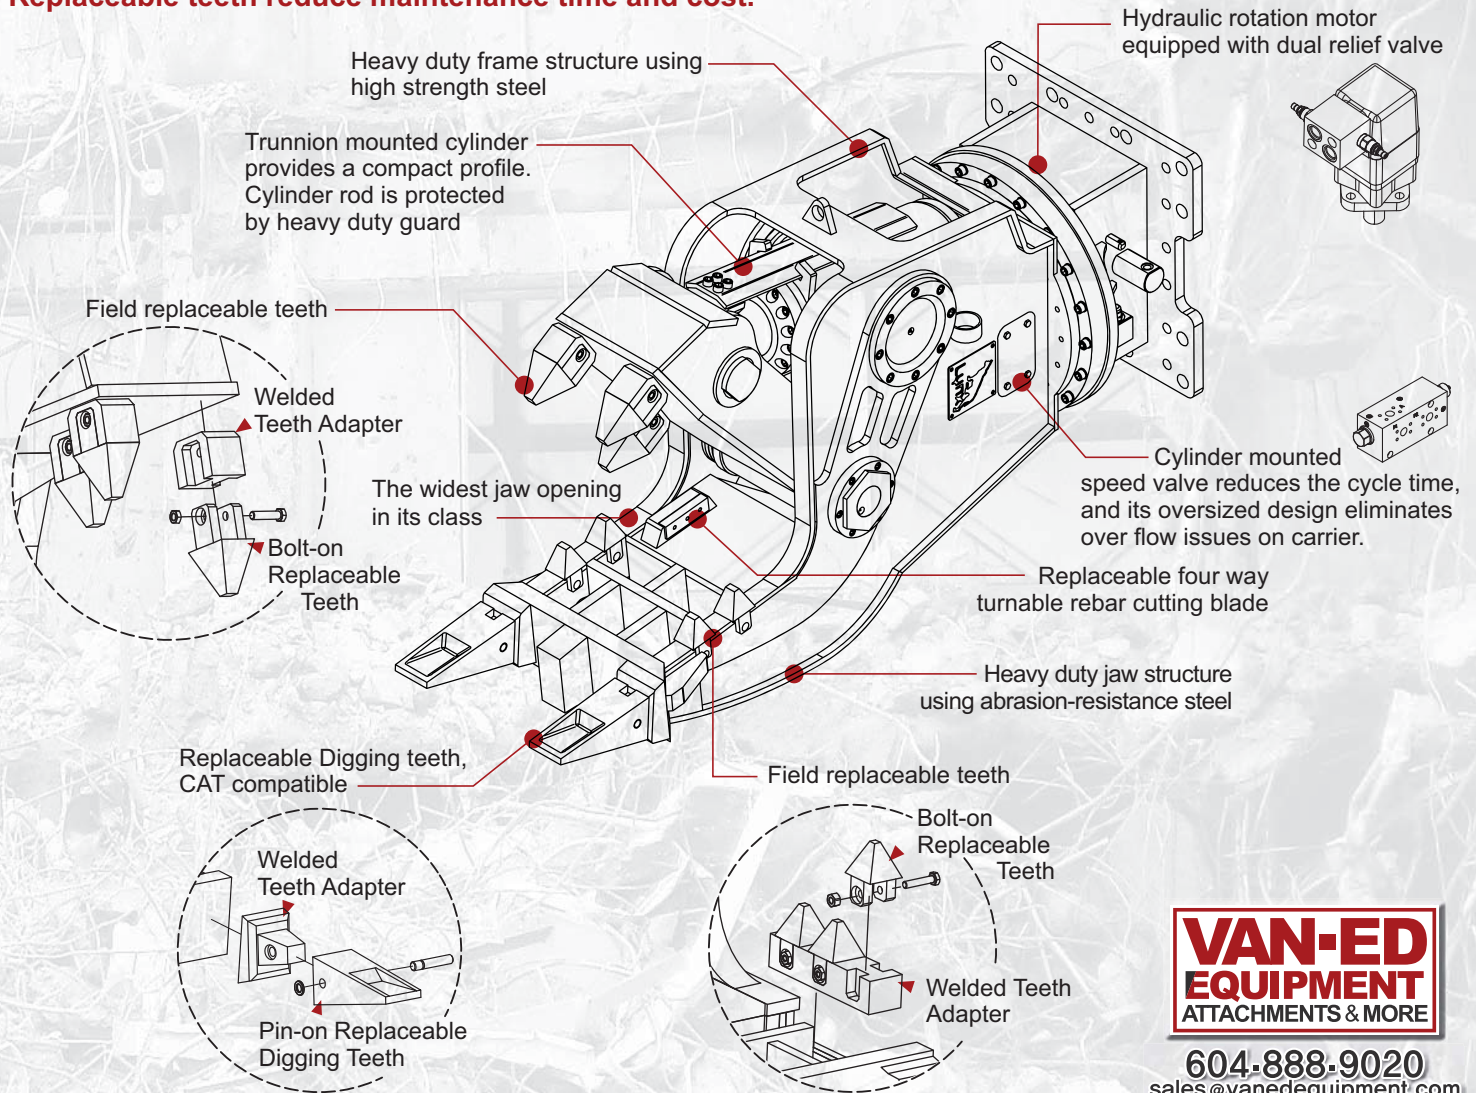

**VAN-ED**  
**EQUIPMENT**  
ATTACHMENTS & MORE


604-888-9020  
sales@vanedequipment.com





# MIDSIZE ROTATING PULVERIZERS VPR-A

FOR 10-20 TON CARRIER

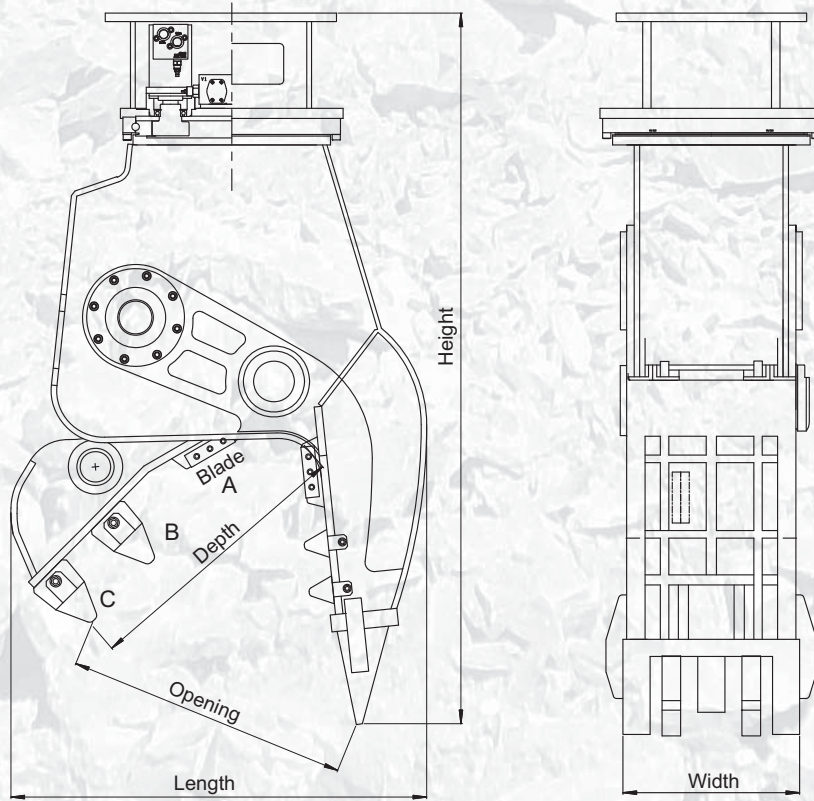

Model		Unit	VPR 152A	VPR 182A	Unit	VPR 152A	VPR 182A
Carrier Weight		M/T	12~20	18~28	M/T	12~20	18~28
Operating Weight		kg	1,190	1,910	lb	2,620	4,220
DIM	Height	mm	1,850	2,090	inch	73	82
	Length		1,170	1,250		46	49
	Width		520	520		20	20
Jaw Opening		mm	780	910	inch	31	36
Jaw Depth			820	865		32	34
Blade Length			140	150		5.5	5.9
Cutting Force [A]		M/T (Metric Ton)	163	186	lb (X1000)	359	409
Crushing Force	[B] Mid		67	84		147	185
	[C] Tip		42	54		93	119
Rated Pressure		bar	320		psi	4,600	
Rated Oil Flow		lpm	160	280	gpm	42	74
Hyd. Rotation	Pressure	bar	180	210	psi	2,610	3,050
	Oil Flow	lpm	28~32	30~38	gpm	7.5~8.5	8~10
	Speed	RPM	10~15		RPM	10~15	
Cycle time	Open	sec	1.9	2.9	sec	1.9	2.9
	Close		1.8	3.0		1.8	3.0

Specifications subject to change without notice.

- Height : Flat Top Mounting
- Cycle Time : Measured at rated flow under no load.