



MINI ROTATING PUVERIZER VPR122

FOR 1-10 TON CARRIER


Designed for secondary processing to remove rebar and size concrete.
360 degree hydraulic rotation increases productivity.

VAN-ED
EQUIPMENT
ATTACHMENTS & MORE

604-888-9020
sales@vanedequipment.com

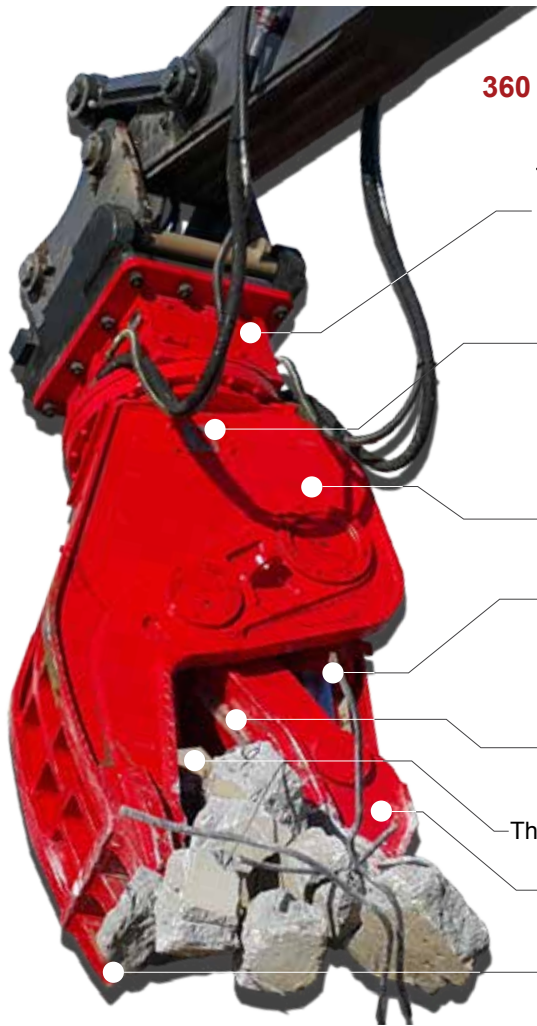

Hydraulic rotation motor equipped with dual relief valve



Cylinder mounted speed valve reduces the cycle time, and its oversized design eliminates over flow issues on carrier.

Heavy duty frame structure using high strength steel


Trunnion mounted cylinder provides a compact profile. Cylinder rod is protected by heavy duty guard

Replaceable four way turnable rebar cutting blade

The widest jaw opening in its class

Heavy duty jaw structure using abrasion-resistance steel

Abrasive resisted steel

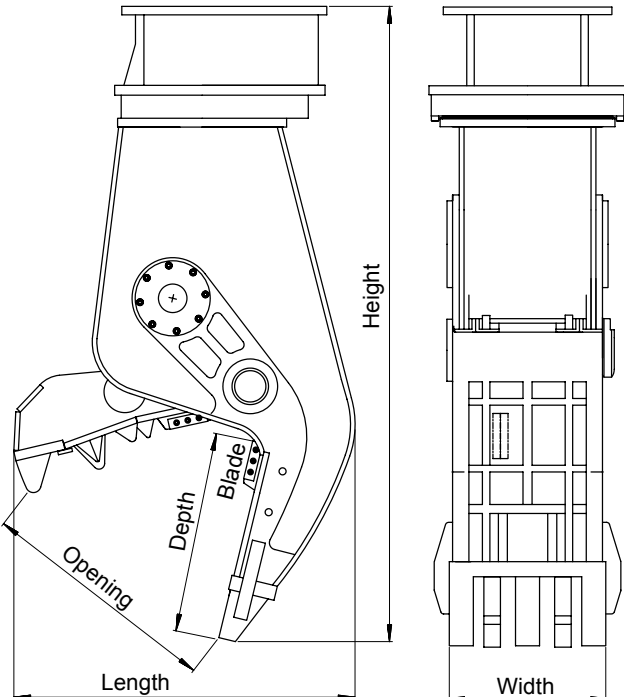

Model	Unit	VPR122	Unit	VPR122	
Carrier Weight	M/T	12~20	M/T	12~20	
Operating Weight	kg	830	lb	1,830	
DIM	Height	1,660		65	
	Length	960	inch	38	
	Width	355		14	
Jaw Opening		700		28	
Jaw Depth	mm	680	inch	27	
Blade Length		100		4.0	
Cutting Force [A]		87		192	
Crushing Force	[B] Mid	M/T (Metric-Ton)	34	lb (X1000)	74
	[C] Tip		21		46
Rated Pressure	bar	250	psi	3,630	
Rated Oil Flow	lpm	82	gpm	21	
Hyd. Rotation	Pressure	bar	210	psi	3,000
	Oil Flow	lpm	28~32	gpm	7~8
	Speed	RPM	10~15	RPM	10~15
Cycle time	Open	sec	1.8	sec	1.8
	Close		2.3		2.3

Specifications subject to change without notice.

- Height : Flat Top Mounting
- Cycle Time : Measured at rated flow under no load.