



# MINI ROTATING PUVERIZER VPR122

FOR 1-1/2 TON CARRIER

Designed for secondary processing to remove rebar and size concrete.  
360 degree hydraulic rotation increases productivity.

**VAN-ED**  
EQUIPMENT  
ATTACHMENTS & MORE

604-888-9020  
sales@vanedequipment.com

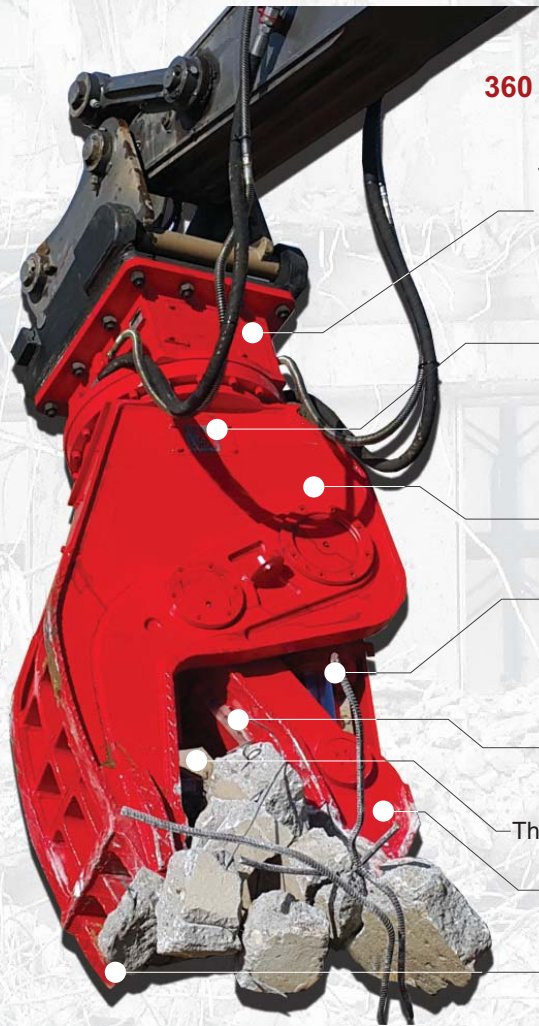

Hydraulic rotation motor equipped with dual relief valve



Cylinder mounted speed valve reduces the cycle time, and its oversized design eliminates over flow issues on carrier.

Heavy duty frame structure using high strength steel


Trunnion mounted cylinder provides a compact profile. Cylinder rod is protected by heavy duty guard

Replaceable four way turnable rebar cutting blade

The widest jaw opening in its class

Heavy duty jaw structure using abrasion-resistance steel

Abrasive resisted steel

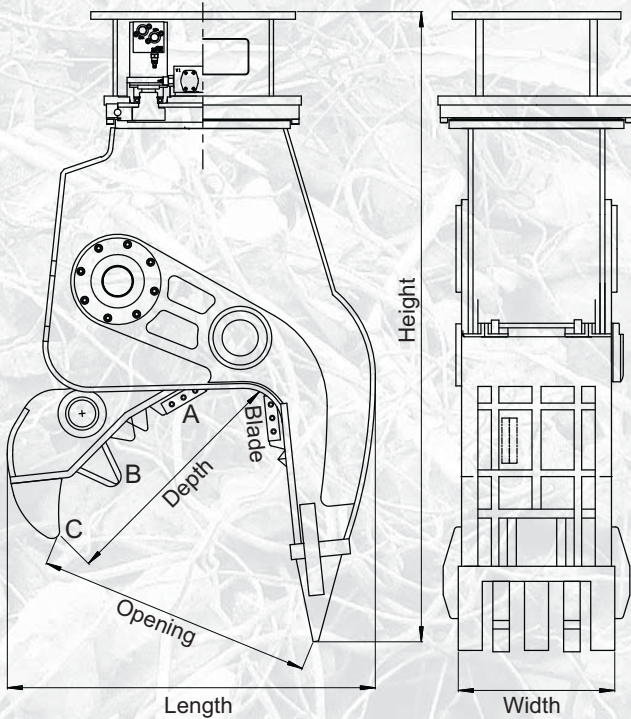

Model	Unit	VPR122	Unit	VPR122
Carrier Weight	M/T	7~12	M/T	7~12
Operating Weight	kg	570	lb	1,270
DIM	Height	1,380	inch	54
	Length	960		38
	Width	355		14
Jaw Opening		700		28
Jaw Depth	mm	680	inch	27
Blade Length		102		4.0
Cutting Force [A]		87		192
Crushing Force	[B] Mid	M/T (Metric Ton)	lb (X1000)	74
	[C] Tip	21		46
Rated Pressure	bar	320	psi	3,600
Rated Oil Flow	lpm	80	gpm	21
Hyd. Rotation	Pressure	bar	psi	3,000
	Oil Flow	lpm	gpm	7~8
	Speed	RPM	RPM	10~15
Cycle time	Open	sec	sec	2.0
	Close	2.6		2.6

Specifications subject to change without notice.

- Height : Flat Top Mounting
- Cycle Time : Measured at rated flow under no load.