

# Extreme Rotary Brush Mower




Heavy-Duty Radial Piston Motor has a high starting torque and is extremely efficient, high quality, and American made



From clear cutting hard woods to mowing grasslands, extreme jobs call for the Extreme Brush Mower. This mower is armored to withstand the toughest conditions. The open front design works to feed material into the mower where it is quickly shredded by the nearly 700 lb fly wheel armed with four 5/8" thick blades.

Funneled open front design channels material to the cutting blades and blade carrier

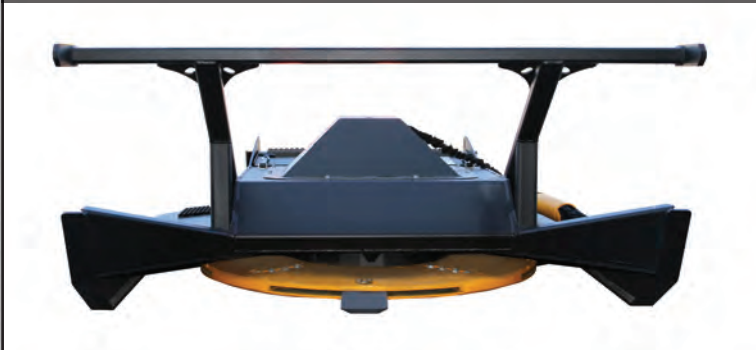


16 Square Carbide Tipped Staggered Teeth are tough, long lasting, and can grind stumps





Take a Picture of This QR Code With Your Smart Phone to See it in Action

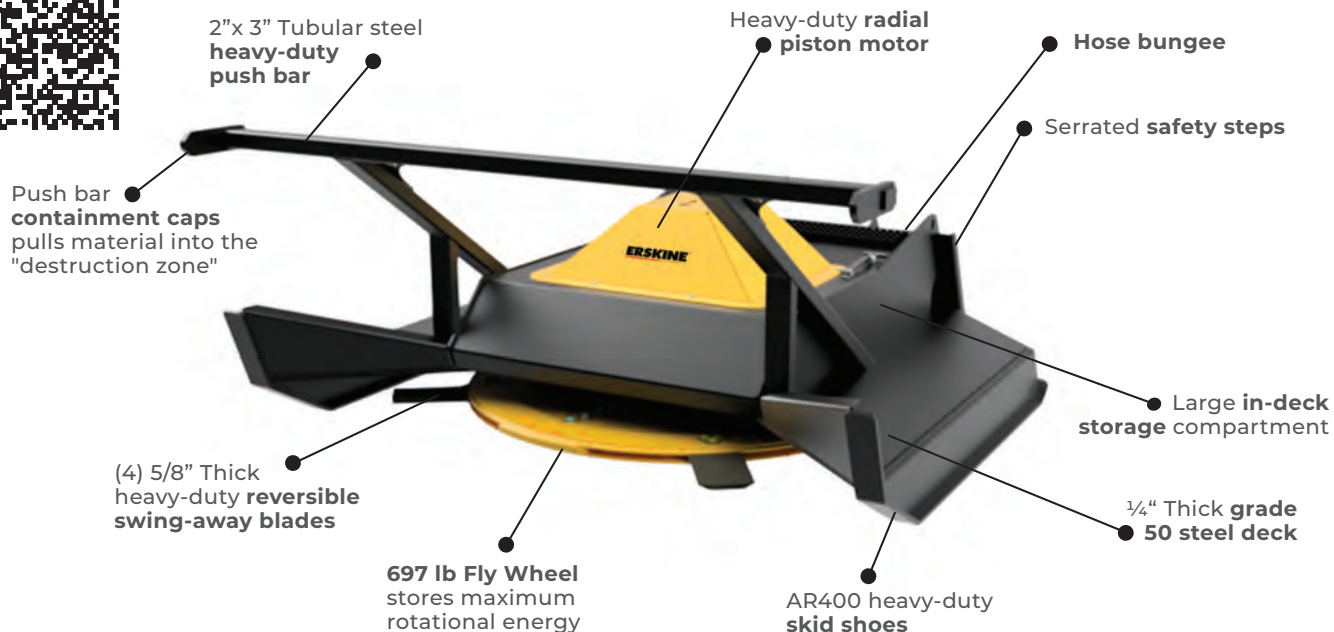

## FEATURES & BENEFITS

- Fully reinforced gusseted deck siding to hold up to the most extreme situations for added strength under extreme conditions
- 4 posts and the bottom of the deck help protect bearing carrier from wires
- Funneled open front design
- 1/4" thick grade 50 steel deck material
- Push Bar: heavy-duty 2x3 construction welded to the deck to topple over the biggest trees
- Radial piston pump motor
- Covered motor for safety
- Large in deck storage compartment
- Tapered and armored design
- Alternating blades for axe like cutting

## SPECIFICATIONS / OPTIONS

| Model                             | 72" (25.0-31.9 GPM)               | 72" (32.0-45.0 GPM)               |
|-----------------------------------|-----------------------------------|-----------------------------------|
| Part Number                       | 901358                            | 901359                            |
| Overall Height                    | 36"                               | 36"                               |
| Overall Length                    | 85"                               | 85"                               |
| Overall Width                     | 78.9"                             | 78.9"                             |
| Cutting Width                     | 72"                               | 72"                               |
| Deck Thickness/<br>Material       | 1/4" Grade 50 Steel               | 1/4" Grade 50 Steel               |
| Skid Shoe Thickness/<br>Material  | 1/2" AR400 Steel                  | 1/2" AR400 Steel                  |
| Output Shaft Diameter             | 3.25"                             | 3.25"                             |
| Shipping Weight                   | 2,485 lb.                         | 2,515 lb.                         |
| Flow Rates                        | 25 - 31 GPM High Flow Only        | 31-45 GPM High Flow Only          |
| Tip Speed                         | 15,700 ft/min @ 30 GPM            | 15,500 ft/min @ 40 GPM            |
| Operating Pressure                | 3,000 - 4,200 psi                 | 3,000 - 4,200 psi                 |
| Storage Compartment<br>Dimensions | 39.8" Wide x 18.8" Long x 9" Deep | 39.8" Wide x 18.8" Long x 9" Deep |
| Blades                            | (4) 5/8" x 6" x 15.75" Axe Blades | (4) 5/8" x 6" x 15.75" Axe Blades |
| Blade Material                    | AR400                             | AR400                             |
| Blade Carrier Weight              | 697 lb.                           | 697 lb.                           |
| Case Drain                        | Required                          | Required                          |
| Stump Grinder Teeth               | (16) 3/4" Carbide Tipped          | (16) 3/4" Carbide Tipped          |

### Options

Replacement Blade Kit  
Factory Installed Couplers

\* For more specification details please see our website [www.erskineattachments.com](http://www.erskineattachments.com)