RAMMER

FACTORY INSTALLED RD3 FOR MYFLEET

CBE (CONSTANT BLOW ENERGY)

MEMBRANE TYPE ACCUMULATORS

SINGLE BODY DESIGN WITHOUT TIE RODS


INTEGRATED TOOL BUSHINGS AND THRUST RING (3 IN 1)


EXCELLENCE LINE HITS SMARTER


The Rammer Excellence Line is a set of stateof-the-art hydraulic hammers for all your rock breaking needs. All Excellence Line hammers now have integrated smart technology for easier fleet management and more efficient processes.

Read more about the product from www.rammer.com/excellence



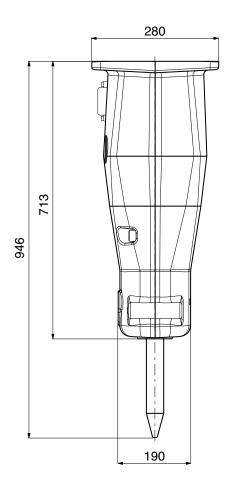

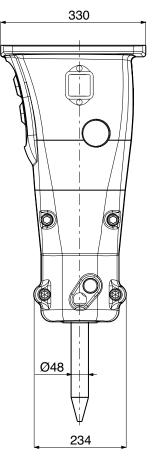



SPECIFICATIONS

Minimum working weight, flange mounted, kg (lb)	150 (330)
Impact rate, bpm	800-3000
Operating pressure, bar (psi)	90-150 (1305-2175)
Pressure relief, max bar (psi)	220 (3190)
Oil flow range, I/min (gal/min)	25-55 (6.6-14.5)
Back pressure, max bar (psi)	20 (290)
Input power, kW (hp)	13.8 (19)
Tool diameter, mm (in)	48 (1.89)
Miniexcavator weight, allowed range t (lb)	1.6-3.6 (3500-7900)
Skid steer, robot weight, allowed range t (lb)	1.1-2.4 (2400-5300)
Noise level, measured sound power level, LWA dB	114
Noise level, guaranteed sound power level, LWA dB	118

TOOLS

Chisel	Spade
Pyramid	Compacting plate
Moil point	

PARTS

Service kit 1 Special tool grease

Sandvik Mining and Construction Oy Taivalkatu 8, P.O.Box 165 Fl- 15101 Lahti, Finland Phone Int. +358 205 44 151 rammer@sandvik.com www.rammer.com

