
THE NEW WORLD STANDARD

MODEL: FS25

- Innovative engineering with an optimized structure for long life and high strength to weight ratio
- Designed with maintenance in mind large access panels are removable for component replacement

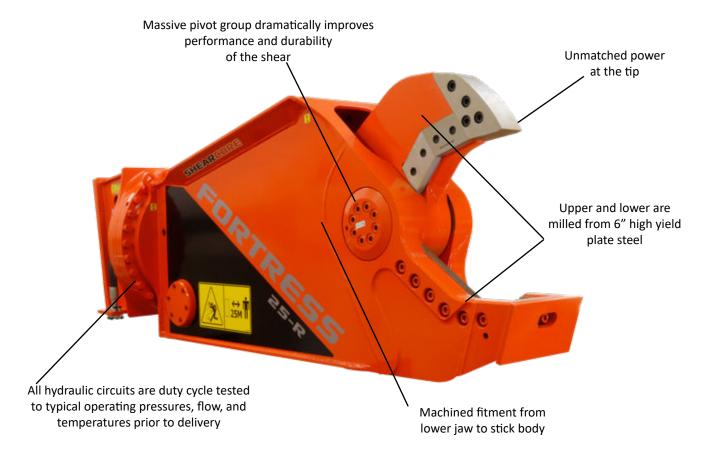

SHEAR SPECIFICATIONS

| Model | Shear Weight (lbs.) | Jaw Opening (in.) | Jaw Depth (in.) | Reach | Minimum Excavator Boom Mount (lbs.) | Minimum Excavator Stick Mount (lbs.) |
|-------|------------------------|----------------------|--------------------|-------|--|---|
| FS25R | 5,900 | 23 | 19 | 8′ 8″ | 30,000 | 45,000 |
| FS25S | 5,200 | 23 | 19 | 8'5" | 30,000 | 45,000 |

Updated 01.10.23