




SHAFT SCREENER

MB-HDS323

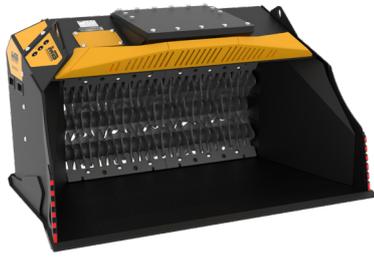

2330 mm



1250 mm

1500 mm



SPECIFICATIONS



Recommended excavator	ton	22 - 35
Recommended backhoe loader/loader*	ton	12 - 16
Weight	ton	2,40
Load capacity	m ³	1,65
Pressure	bar	250 - 300
Oil flow rate**	l/min	120 - 160

* Please verify machine's Rated Operating Capacity.

** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8/RQ20/RQ50 Sifting kit	8/20/50 mm	Sifting damp/dry soil Soil aeration
 RM Mixer kit	-	Soil aeration Compost aeration Charcoal reduction Glass reduction Drywall reduction
 RE8/RE16 Fine Sifting kit	8/16 mm	Sifting damp/dry soil
 RC Compost kit	36,5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

ACCESSORIES

RQ8/RQ20/RQ50 Sifting kit	RM Mixer kit
RE8/RE16 Fine Sifting kit	RC Compost kit
Shaft holder	24 month warranty

APPLICATION AREAS



ROAD WORKS



QUARRIES



MINES



TUNNELS



ENCLOSED SPACES



PIPELINES



RECYCLING AGGREGATES



EXCAVATION



URBAN CONSTRUCTION
SITES



FOUNDRIES



MAINTAINING LANDSCAPE
AND AGRICULTURAL AREAS