


SHAFTS SCREENER

MB-HDS533

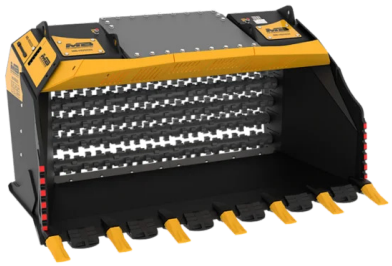

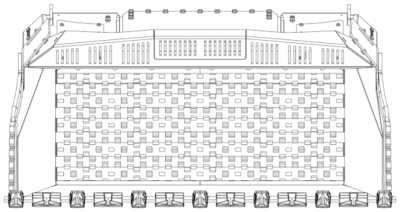

A



C

B

SPECIFICATIONS

Recommended excavator	ton	50 - 80
Recommended loader*	ton	30 - 50
Weight**	ton	6,60
Load capacity	m³	3,80 - 5,20
Pressure	bar	250 - 300
Back pressure	bar	< 20
Oil flow rate***	l/min	230 - 250
Size A	mm	3400
Size B	mm	2130
Size C	mm	1770

* Please verify machine's Rated Operating Capacity.
** The package includes an RQ Shaft Kit. The weight may vary based on the installed kit.
*** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
RQ45 Sifting kit	45 mm	Soil Aeration Sifting and sorting damp/dry materials

* Shafts in closed position.

OPTIONAL ACCESSORIES

RM Mixer kit
RQ45 Sifting kit
24 Month Warranty

APPLICATION AREAS

Road works and Infrastructures
Quarries and Mines
Remote Areas and Complex Logistics
Pipelines
Inert materials recycling and Waste management
Earthmoving and Excavations
Environmental Remediation

The data and images provided above are not binding, as the manufacturer reserves the right to make improvements to its products at any time and without notice. It is the responsibility of the installer to verify the suitability of the carrier machine with regard to the weight and specifications of the attachment.