

SORTING GRAPPLE

MB-G400 S4



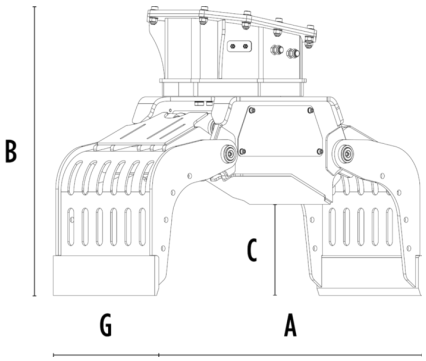

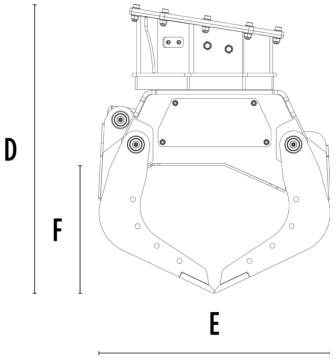

SPECIFICATIONS

Recommended excavator	lb	5,290 - 8,820
Weight	lb	441
Capacity (claws closed)	cy	0.10
Rotation	Degree	360°
Oil pressure (rotation)	PSI	1,885 - 2,466
Oil flow rate (rotation)	gal/min	2 - 3
Oil pressure (opening - closing)	PSI	2,611 - 3,191
Oil flow rate (opening - closing)	gal/min	5 - 7
Size A	in	41
Size B	in	31
Size C	in	13
Size D	in	32
Size E	in	27
Size F	in	15
Size G	in	16

OPTIONAL ACCESSORIES

Clam shell kit	Serrated side plate kit
Serrated side profile kit	12 V Electrical Kit (for 2 hose functionality)
24 Month Warranty	

APPLICATION AREAS

Demolitions and Renovations

Road works and Infrastructures

Enclosed Spaces

Urban Construction Sites

Pipelines

Inert materials recycling and Waste management

Agriculture and Landscaping

Forest maintenance

EN

The data and images provided above are not binding, as the manufacturer reserves the right to make improvements to its products at any time and without notice. It is the responsibility of the installer to verify the suitability of the carrier machine with regard to the weight and specifications of the attachment.