

SORTING GRAPPLE

MB-G940 S4



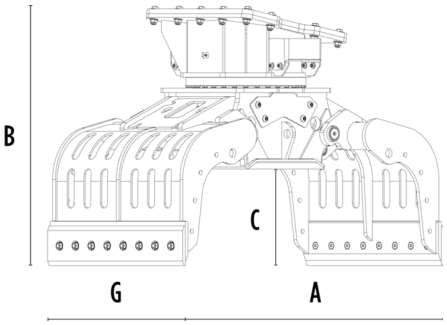

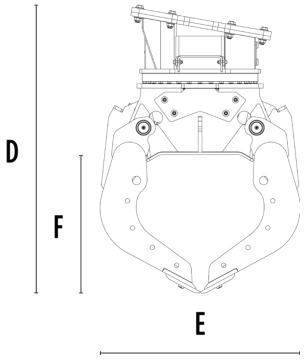

SPECIFICATIONS

Recommended excavator	lb	37,480 - 48,500
Weight	lb	2,425
Capacity (claws closed)	cy	0.60
Rotation	Degree	360°
Oil pressure (rotation)	PSI	2,321 - 3,191
Oil flow rate (rotation)	gal/min	5 - 9
Oil pressure (opening - closing)	PSI	2,901 - 5,802
Oil flow rate (opening - closing)	gal/min	16 - 18
Size A	in	74
Size B	in	51
Size C	in	21
Size D	in	59
Size E	in	42
Size F	in	29
Size G	in	38

OPTIONAL ACCESSORIES

Multi-purpose blade kit	Clam shell kit
Serrated side plate kit	Grip improvement kit
Rubber protection kit	Serrated side profile kit
Rotation power extender kit	12 V Electrical Kit (for 2 hose functionality)
Remote power control system	24 Month Warranty

APPLICATION AREAS

Demolitions and Renovations

Road works and Infrastructures

Enclosed Spaces

Urban Construction Sites

Pipelines

Inert materials recycling and Waste management

Agriculture and Landscaping

Forest maintenance

EN

The data and images provided above are not binding, as the manufacturer reserves the right to make improvements to its products at any time and without notice. It is the responsibility of the installer to verify the suitability of the carrier machine with regard to the weight and specifications of the attachment.