

NEW

ROAD PLANERS FOR EXCAVATORS

RPL/HY/MINI

Road planer for 2-4 ton excavators .

The RPL/HY/MINI is a road planer for 2-4 ton excavators, capable of milling down to 3.5 inches deep. It is ideal for preparing road surfaces for a new layer of asphalt or concrete to be applied, or for simplifying excavation operations. The wide range of motion of the self-

leveling excavator attachment system allows the head to stay properly aligned during operation. The range is completed by teeth specially designed for asphalt or concrete surfaces.




2-4 t



8-13 gal/min




Depth
3.5 in

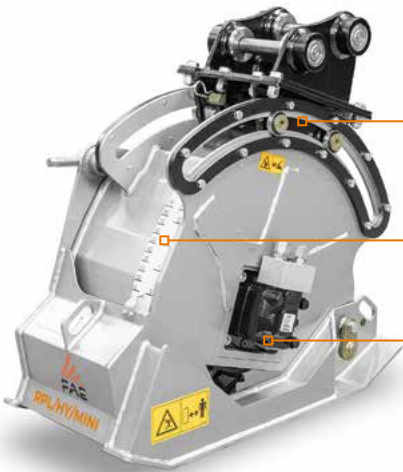

Attachment with self-leveling system
for proper head alignment during operation

Depth Indicator

Radial piston motor
to maximize performance

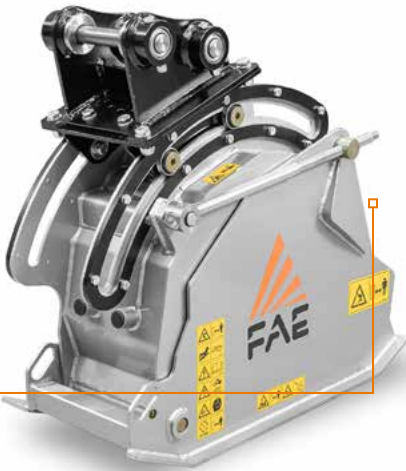

Mechanical adjustment of working depth

MAIN OPTIONS



Teeth for working on
concrete



Custom attachment bracket

STANDARD EQUIPMENT

250 cc hydraulic orbital motor	Enclosed, dust-resistant machine body
Direct-drive transmission	Fittings for hydraulic connections
Hydraulic block with anticavitation valve	Self-leveling attachment system
Mechanically adjustable working depth	Rotor with picks R/44/A

OPTIONS

Customized attachment bracket kit with customized pins	Multiple tooth options
Case drain required	

MODEL

RPL/HY/MINI-25

Flow rate (gal/min)	8-13
Pressure (PSI)	2200-3350
Excavator weight (t)	2-4
Working width (in)	10
Total width (in)	17
Weight (lbs)	529
Rotor diameter (in)	18.1
Working depth (in)	3.5
N° picks type R/44/A	26

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE R



PICK R/44/A
(standard)



PICK R/44/C
(optional)