

NEW

ROAD PLANERS FOR EXCAVATORS

RPL/HY/MINI

Road planer for excavators from 2 to 4 t.

The RPL/HY/MINI is a road planer for excavators from 2 to 4 t, capable of milling down to 9 cm deep. The RPL/HY/MINI is ideal for preparing road surfaces for resurfacing before laying a new layer of asphalt or concrete, or for simplifying excavation operations.

The large travel of the self-leveling excavator attachment system allows the head to stay properly aligned during operation. The range is completed by teeth specially designed for asphalt road surfaces or concrete.



2-4 t



30-50 L/min




Depth
9 cm



Attachment with self-levelling system
for proper head alignment during operation

Depth Indicator

Radial pistons motor
to maximize performance

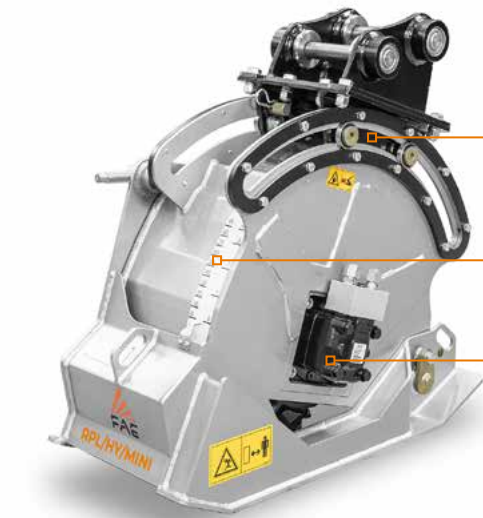

Mechanical adjustment of working depth



STANDARD EQUIPMENT

250 cc hydraulic orbital motor	Enclosed, dust-resistant machine body
Direct-drive transmission	Fittings for hydraulic connections
Hydraulic block with anticavitation valve	Self-leveling attachment system
Mechanically adjustable working depth	Rotor with picks R/44/A

OPTIONS

Customized attachment bracket kit with customized pins	Multiple tooth options
--	------------------------

MODEL	RPL/HY/MINI-25
Flow rate (L/min)	30-50
Pressure (bar)	150-230
Excavator weight (t)	2-4
Working width (mm)	250
Total width (mm)	430
Weight (kg)	240
Rotor diameter (mm)	460
Working depth (mm)	90
N° picks type R/44/A	26

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

MAIN OPTIONS



Teeth for working on
concrete



Custom attachment bracket

ROTOR TYPE R



PICK R/44/A
(standard)



PICK R/44/C
(optional)